
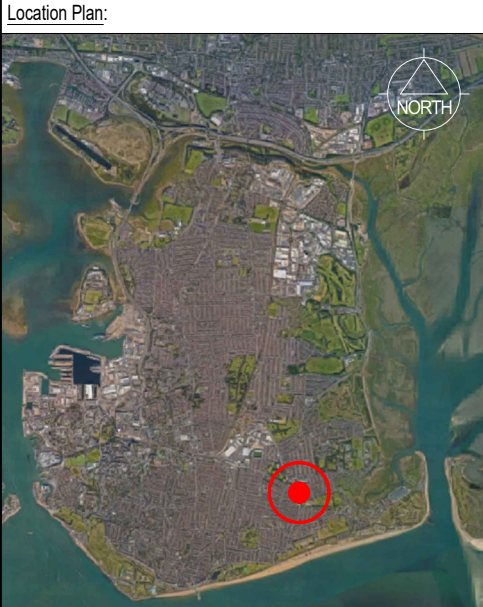


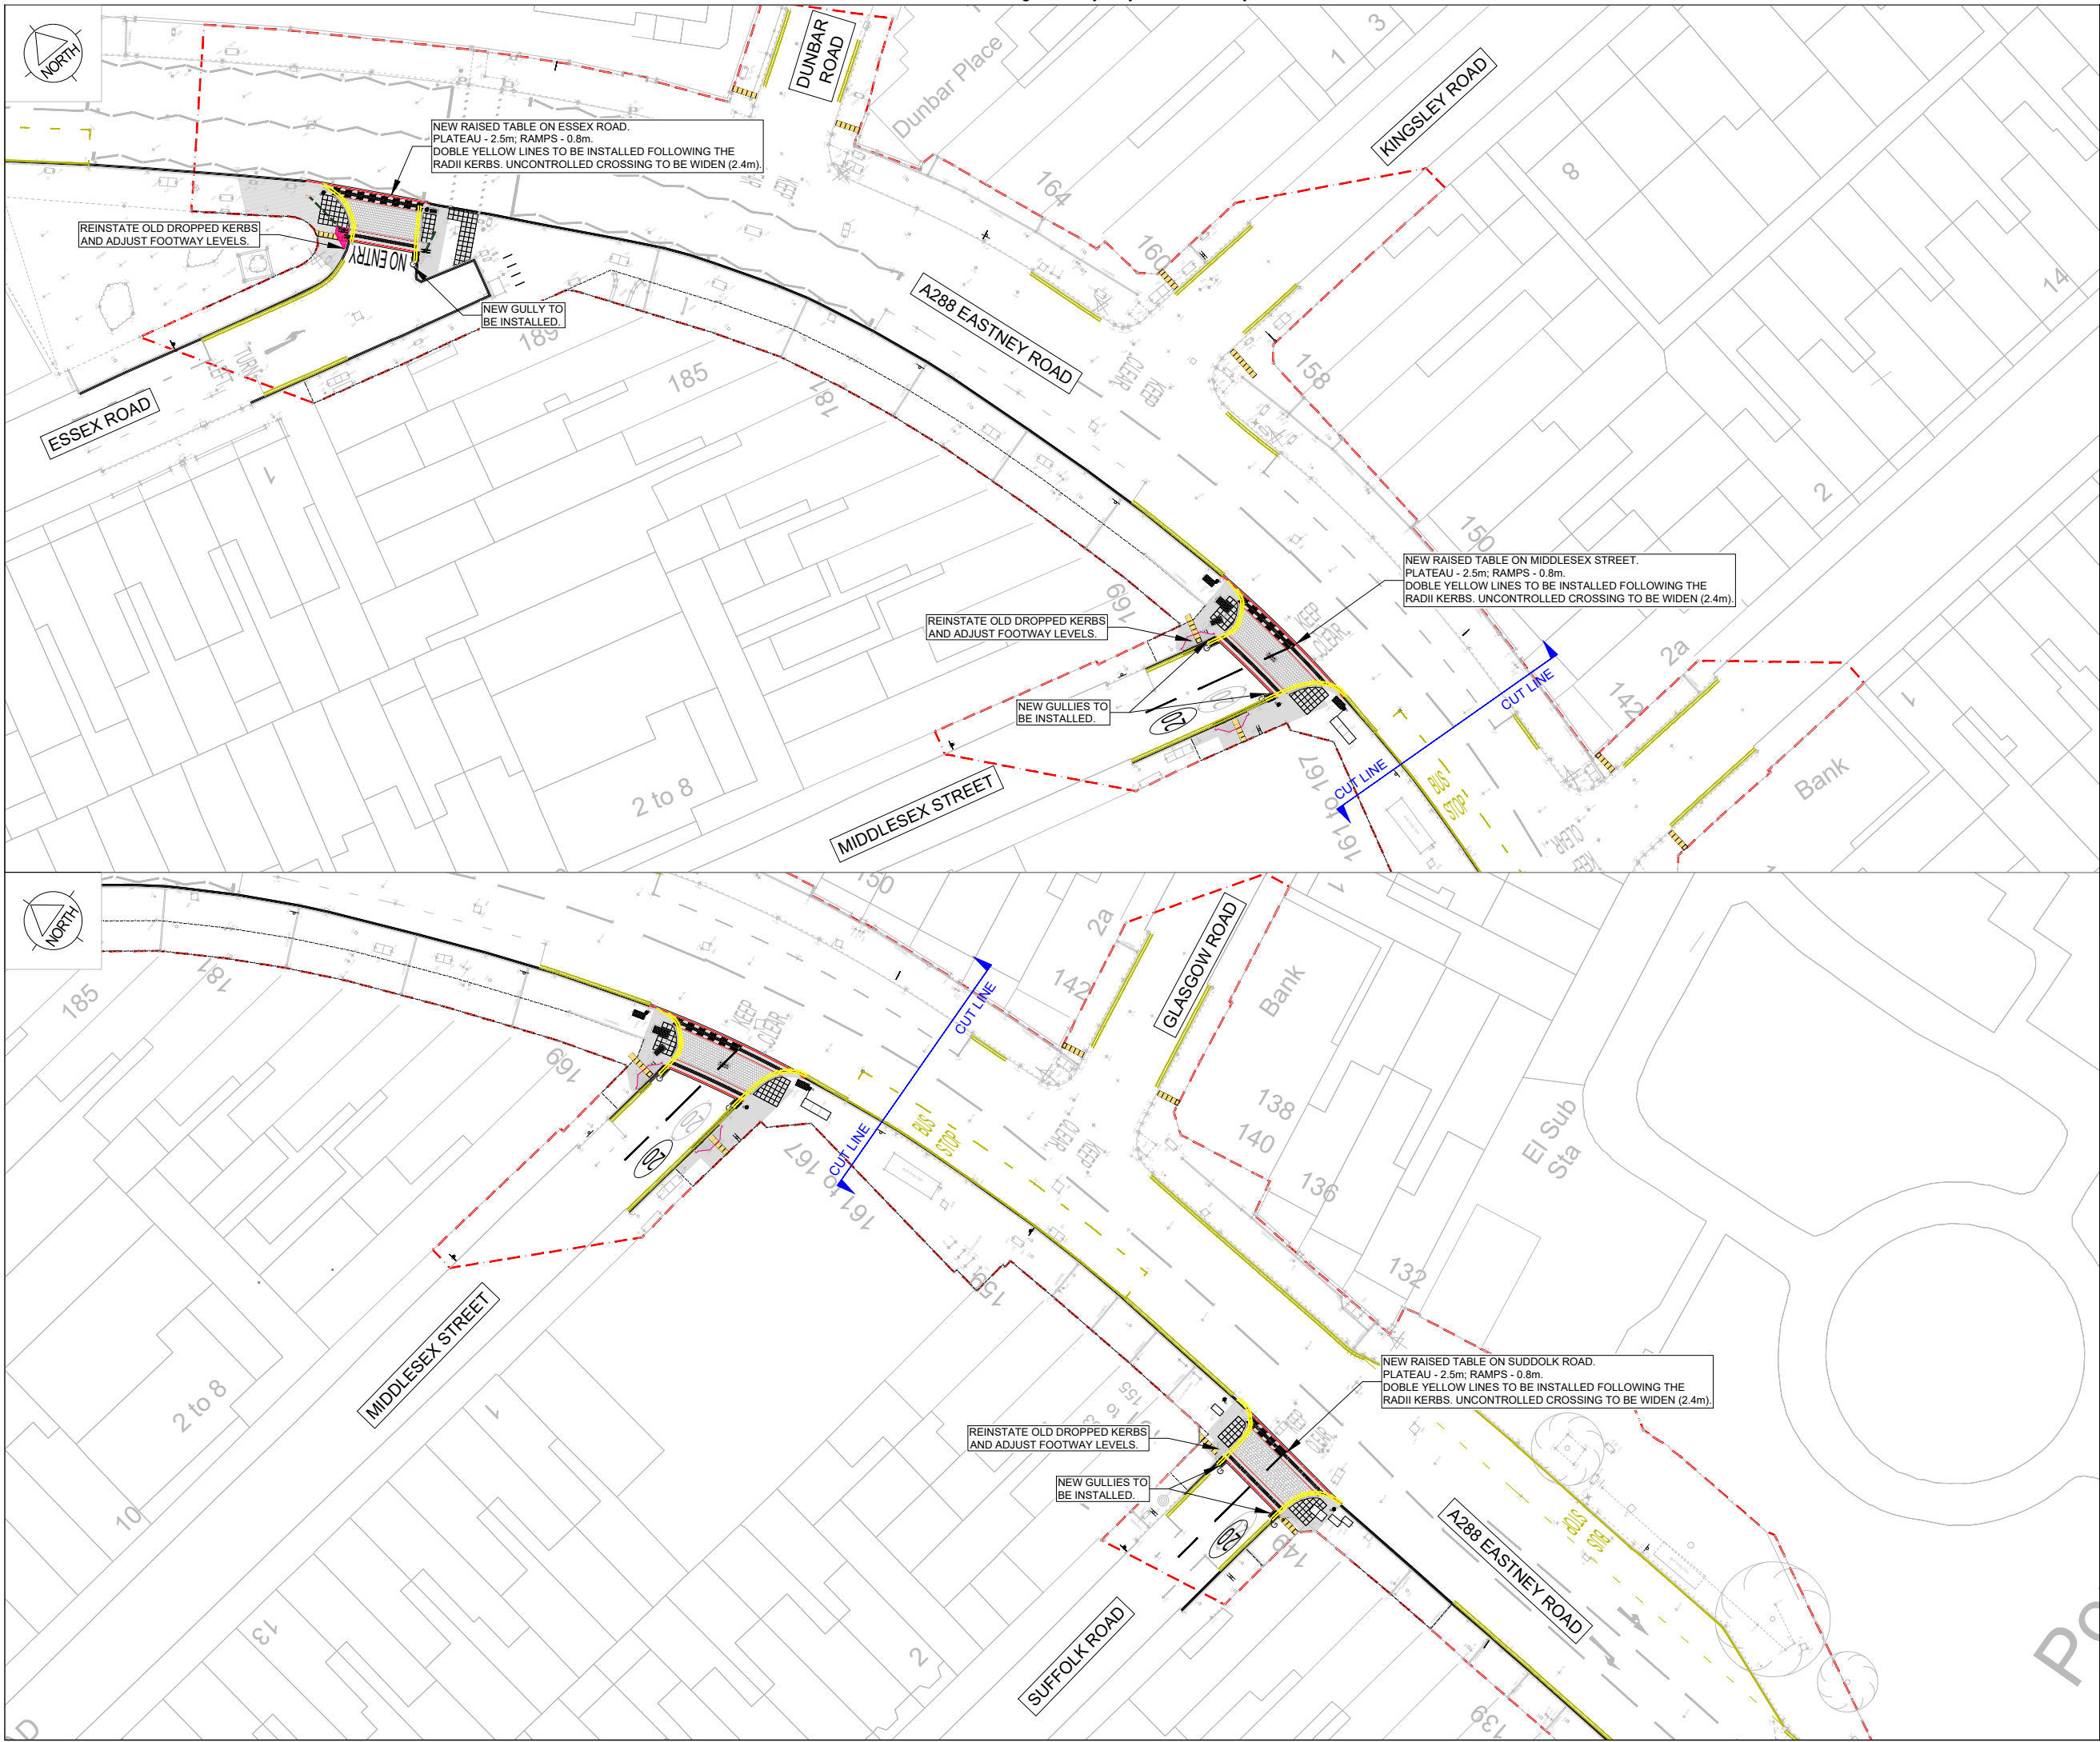

- General Notes:**
- 1.All details are to be checked by the contractor prior to commencement of the works on site.
 - 2.All dimensions are in metres unless otherwise stated.
 - 3.Traffic management to be in accordance with Chapter 8 of the traffic signs manual and related codes of practice.
 - 4.Refer to statutory information for underground services location within site extents.
 - 5.Drawing to be printed in colour.
 - 6.New construction levels & road markings to tie into existing.
 - 7.All works are to be carried out in accordance with PCC standard details unless noted otherwise.
 - 8.Drawing to be read in conjunction with Drawings HWI1229 - SC-01,HWI1229 - SC-02, HWI1229 - SC-03 and HWI1229-RM-01
 - 9.Applicable PCC Standard Details:
 - SD-1100-07 - Type 2A Footway detail
 - SD-1100-01 - Kerb Replacement (On new base)
 - SD-1100-04 - Conservation kerb
 - SD-500-06 - Gully type 1
 - SD-500-07 - Chamber Type CCG Combined Catchpit / Gully

DRAFT

A	10.06.24	Initial issue. Revised design.	EA	FL
Rev	Date	Revision Details	Amended	Approved

Project

Milton Market District Centres Work

Drawing Title

General Arrangement Revised Design (Preliminary)

Portsmouth

CITY COUNCIL

REGENERATION

Assistant Director (Infrastructure)

Martin Lavers BSc CEng MICE

Date	June 2024	Scale	1:500 @ A3
Design/Survey by	TL	Drawn by	TL
		Checked by	FL

Design No	Revision No.
HWI1227-GA-07	A

FEASIBILITY	*	DRAFT	CONSTRUCTION
INFORMATION		TENDER	AS BUILT